AC134 Series

Low Frequency Accelerometer, Side Exit Connector, 500 mV/g








Product Features

Designed for low speed Rotors, Main Bearings, and Gear Box Inputs, but can also be used for High Frequency Detection.

Can be used with any application that requires low and high frequency measurements.

- ▶ 500 mV/g Sensitivity, ±10% Sensitivity
- ▶ 0.1 Hz for Low Frequency Measurements
- ▶ 8,000 Hz for High Frequency Detection

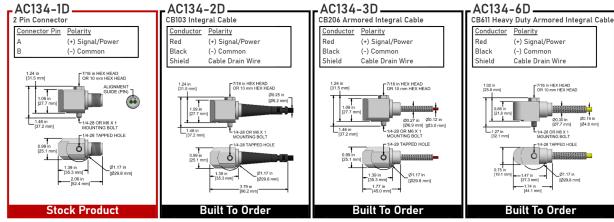

Specifications	Standard		Metric	Specifications	Standard		Metric
Part Number	AC134		M/AC134	Environmental			
Sensitivity (±10%)		500 mV/g		Temperature Range	-58 to 250°F		-50 to 121°C
Frequency Response (±3dB)	6-480,000 CPM		0,1-8000 Hz	Maximum Shock Protection		5,000 g, peak	
Frequency Response (±10%)	36-180,000 CPM		0,6-3000 Hz	Electromagnetic Sensitivity		CE	
Dynamic Range		± 10 g, peak		Sealing		Welded, Hermetic	
Electrical				Physical			
Settling Time		<2 seconds		Sensing Element		PZT Ceramic	
Voltage Source (IEPE)		18-30 VDC		Sensing Structure		Shear Mode	
Constant Current Excitation		2-10 mA		Weight	5.7 oz		160 grams
Spectral Noise @ 10 Hz		1.7 μg/√Hz		Case Material		316L Stainless Stee	l
Spectral Noise @ 100 Hz		0.2 μg/√Hz		Mounting		1/4-28	
Spectral Noise @ 1000 Hz		0.12 μg/√Hz		Connector (Non-Integral)		2 Pin MIL-C-5015	
Output Impedance		<100 ohm		Resonant Frequency	1,080,000 CPM		18000 Hz
Bias Output Voltage		10-14 VDC		Mounting Torque	2 to 5 ft. lbs.		2,7 to 6,8 Nm
Case Isolation		>10 ⁸ ohm		Mounting Hardware	1/4-28 Captive Bolt		M6x1 Captive Bol
				Calibration Certificate		CA10	

Typical Frequency Response

