

AC192 Series

Compact, Multi-Purpose Accelerometer, Top Exit Connector / Cable, 100 mV/g



VIBRATION ANALYSIS HARDWARE



Product Features

High Performance in an Affordable Compact Sensor


Very Low Noise and Superior RF Immunity

- ▶ 100 mV/g Sensitivity, $\pm 10\%$
- ▶ $\pm 80g$ Dynamic Range
- ▶ Standard 2 Pin MIL Connection on non integral options

AC192-1D

2 Pin Connector

Connector Pin	Polarity
A	(+) Signal/Power
B	(-) Common




Stock Product

AC192-2D

CB103 Integral Cable

Conductor	Polarity
Red	(+) Signal/Power
Black	(-) Common
Shield	Cable Drain Wire




Built To Order

AC192-3D

CB206 Armored Integral Cable

Conductor	Polarity
Red	(+) Signal/Power
Black	(-) Common
Shield	Cable Drain Wire




Built To Order

AC192-6D

CB611 Heavy Duty Armored Integral Cable


Conductor	Polarity
Red	(+) Signal/Power
Black	(-) Common
Shield	Cable Drain Wire



Built To Order

Specifications	Standard	Metric	Specifications	Standard	Metric
Part Number	AC192	M/AC192	Environmental		
Sensitivity ($\pm 10\%$)	100 mV/g		Temperature Range	-58 to 250°F	-50 to 121°C
Frequency Response ($\pm 3dB$)	24-780,000 CPM	0.4-13000 Hz	Maximum Shock Protection	5000 g, Peak	
Frequency Response ($\pm 10\%$)	60-540,000 CPM	1.0-9000 Hz	Electromagnetic Sensitivity	CE	
Frequency Response ($\pm 5\%$)	600-300,000 CPM	10-5000 Hz	Sealing	Welded, Hermetic	
Dynamic Range	$\pm 80 g$, peak		Submersible Depth	200 ft.	60 m
Electrical			Physical		
Settling Time	<2 Seconds		Sensing Element	PZT Ceramic	
Voltage Source (IEPE)	18-30 VDC		Sensing Structure	Shear Mode	
Constant Current Excitation	2-10 mA		Weight	1.8 oz	51 grams
Spectral Noise @ 10 Hz	8 $\mu g/\sqrt{Hz}$		Case Material	316L Stainless Steel	
Spectral Noise @ 100 Hz	4 $\mu g/\sqrt{Hz}$		Mounting	1/4-28	
Spectral Noise @ 1000 Hz	2 $\mu g/\sqrt{Hz}$		Connector (Non-Integral)	2 Pin MIL-C-5015	
Output Impedance	<100 ohm		Resonant Frequency	1,560,000 CPM	26000 Hz
Bias Output Voltage	10-14 VDC		Mounting Torque	2 to 5 ft. lbs.	2.7 to 6.8 Nm
Case Isolation	>10 ⁸ ohm		Mounting Hardware	1/4-28 Stud	M6x1 Adapter Stud
			Calibration Certificate		CA10

Typical Frequency Response

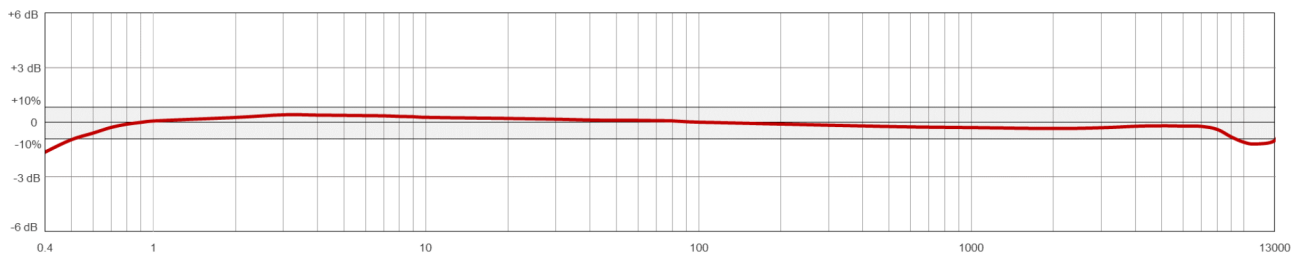

Backed by our Unconditional Lifetime Warranty

www.ctconline.com | sales@ctconline.com | 585-924-5900