

AC216 Series

Premium Series, Magnet Mount Accelerometer, Side Exit Connector, 100 mV/g



VIBRATION ANALYSIS HARDWARE



Product Features

Premium Route-Based Sensor


High Performance at a Reasonable Price

- ▶ Specifically Designed to Use with MH214-3A Magnet
- ▶ Comfortable Ergonomic Design Makes Data Collection Easy
- ▶ ±80 g, Dynamic Range, ±5% Sensitivity

AC216-1A

2 Pin Connector


Connector Pin	Polarity
A	(+) Signal/Power
B	(-) Common



Stock Product

Specifications	Standard	Metric	Specifications	Standard	Metric
Sensitivity (±5%)		100 mV/g	Environmental		
Frequency Response (±3dB)	30-900,000 CPM	0.5-15000 Hz	Temperature Range	-58 to 250°F	-50 to 121°C
Frequency Response (±10%)	60-600,000 CPM	1.0-10000 Hz	Maximum Shock Protection		5,000 g, peak
Frequency Response (±5%)	120-420,000 CPM	2.0-7000 Hz	Electromagnetic Sensitivity		CE
Dynamic Range		± 80 g, peak	Sealing		Welded, Hermetic
Electrical			Physical		
Settling Time	<2.0 seconds		Sensing Element		PZT Ceramic
Voltage Source (IEPE)	18-30 VDC		Sensing Structure		Shear Mode
Constant Current Excitation	2-10 mA		Weight	4.4 oz	124 grams
Spectral Noise @ 10 Hz	8 µg/√Hz		Case Material		316L Stainless Steel
Spectral Noise @ 100 Hz	4 µg/√Hz		Mounting		1/4-28
Spectral Noise @ 1000 Hz	2 µg/√Hz		Connector (Non-Integral)		2 Pin MIL-C-5015
Output Impedance	<100 ohm		Resonant Frequency	1,560,000 CPM	26000 Hz
Bias Output Voltage	10-14 VDC		Mounting Torque		2 to 5 ft. lbs. 2,7 to 6,8 Nm
Case Isolation	>10 ⁸ ohm		Mounting Hardware	1/4-28 Integral Stud	M6x1 Integral Stud
			Calibration Certificate		CA10

Typical Frequency Response

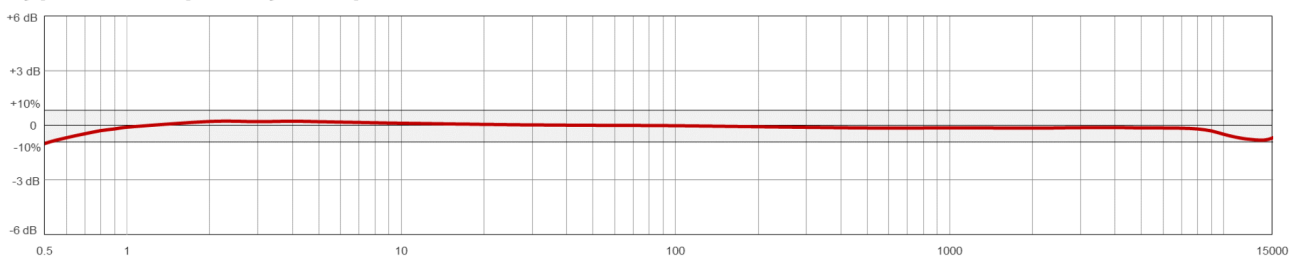

Backed by our Unconditional Lifetime Warranty

www.ctconline.com | sales@ctconline.com | 585-924-5900