

# DC100930 Series

5 mm PRO FFv Proximity Probe Extension Cable



PROTECTION & RELIABILITY INSTRUMENTS




## Product Features

PRO DC100930 extension cables combine with DP1009 series probes and DD100980 series drivers to form a complete assembly to monitor vibration and shaft position

Matched with PRO FFv probes and driver assemblies for cost effective and reliable measurements

- ▶ Excellent chemical resistance
- ▶ Protective sleeves to cover connections (optional)
- ▶ Upgraded to include SecureLock connector

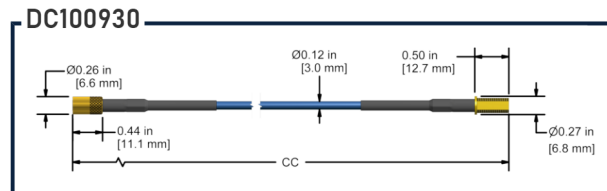

Lengths AA, BB, and CC are configurable in the [CTC Part Creator](#)

## Specifications

Temperature Range	-49°F (-45°C) to 250°F (121°C)
Material	FEP (Flouroethylene Propylene) Jacket
Connector	SecureLock
Connector Pull Strength	Up to 70 lbs.
System Length	Matched to 5 & 7 meter system lengths
Bending Radius	1.16 in (2.95 cm)

**Built to Order**

Lifetime Warranty on Materials & Workmanship

www.ctconline.com | sales@ctconline.com | 585-924-5900