

# DD100791 Series

11 mm PRO Proximity Probe Driver for Eddy Current Probe, 4-20 mA Axial Applications



PROTECTION & RELIABILITY INSTRUMENTS




## Product Features

PRO Line Proximity Drivers pair with PRO Line Proximity Probes to offer configurable machinery protection with high quality components and industry best lead time

4-20mA current loop provides power to the driver, and a current output proportional to Dynamic Displacement

- ▶ Isolated voltage output standard at terminal block (Vout and Com)
- ▶ Isolated voltage output at the BNC
- ▶ Upgraded to include SecureLock connector

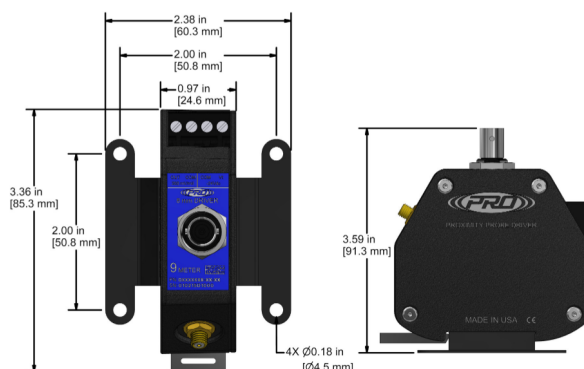

## Specifications

Temperature Range	-49°F (-45°C) to 189°F (85°C)
Enclosure	Aluminum
Probe Connector	SecureLock
Power & Output Connector	4 Position Terminal Block & BNC
Input Voltage	-17.5 to -30 VDC
Linear Range	20-180 mils (0.5 - 4.5 mm)
Nominal Voltage Output	-100 mV/mil (-3.94 V/mm)
4-20 mA Output Proportional To	DC Displacement, Thrust

**Built to Order**

## Optional Regulatory Approvals

### US & Canada (CSA):

Class I Division 1 Groups A, B, C, D  
Class II Division 1 Group E, F, G  
Class III  
Class I Zone 0 AEx ia IIC  
Class I Division 2 Groups A, B, C, D  
Class II Division 2 Groups E, F, G  
Ex ia IIC Ga

### ATEX:

SIRA 16ATEX2084X  
Ex ia IIC

### International (IECEx):

IECEx CSA 16.0017X  
Ex ia IIC

### Temperature Codes:

T4 = -45°C to 100°C  
T5 = -35°C to 85°C



CSA, ATEX, IECEx Approvals Require Intrinsically Safe Barrier Driver must be mounted in a NEMA 4x and/or IP6x enclosure  
**FOR REFERENCE ONLY, PLEASE REFER TO CONTROL DRAWING**

**Lifetime Warranty on Materials & Workmanship**

www.ctconline.com | sales@ctconline.com | 585-924-5900