

# DR100999 Series

FFv PRO Proximity Probe Driver with Scaled 4-20 Output of RPM



PROTECTION & RELIABILITY INSTRUMENTS




## Product Features

PRO Line Proximity Drivers pair with PRO Line Proximity Probes to offer configurable machinery protection with high quality components and industry best lead time

4-20mA current loop provides power to the driver, and a current output proportional to RPM Scale

- ▶ Isolated voltage output standard at terminal block (Vout and Com)
- ▶ Isolated voltage output at the BNC
- ▶ Complete hardware system is compatible with all standard condition monitoring software

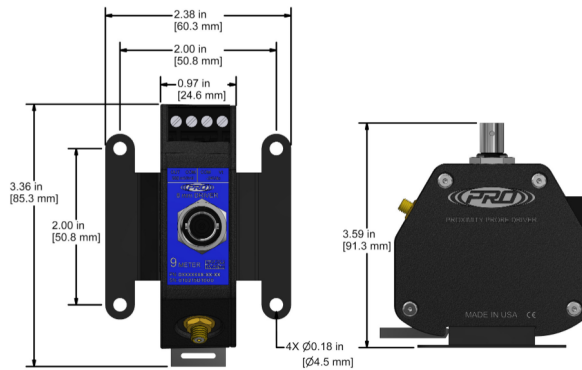

## Specifications

Temperature Range	-49°F (-45°C) to 189°F (85°C)
Enclosure	Anodized Aluminum
Probe Connector	SecureLock
Power & Output Connector	4 Position Terminal Block & BNC
Input Voltage	-17.5 to -30 VDC
Linear Range	10-70 mils (0.25 - 1.78 mm)
Nominal Voltage Output	-200 mV/mil (-7.87 V/mm)
4-20 mA Output Proportional To	RPM Scale

## Built to Order

## Optional Regulatory Approvals

### US & Canada (CSA):

Class I Division 1 Groups A, B, C, D  
 Class II Division 1 Group E, F, G  
 Class III  
 Class I Zone 0 AEx ia IIC  
 Class I Division 2 Groups A, B, C, D  
 Class II Division 2 Groups E, F, G  
 Ex ia IIC Ga

### ATEX:

SIRA 16ATEX2084X  
 Ex ia IIC

### International (IECEx):

IECEx CSA 16.0017X  
 Ex ia IIC

### Temperature Codes:

T4 = -45°C to 100°C  
 T5 = -35°C to 85°C



CSA, ATEX, IECEx Approvals Require Intrinsically Safe Barrier Driver must be mounted in a NEMA 4x and/or IP6x enclosure  
**FOR REFERENCE ONLY, PLEASE REFER TO CONTROL DRAWING**

Lifetime Warranty on Materials & Workmanship

www.ctconline.com | sales@ctconline.com | 585-924-5900