BD|SENSORS
pressure measurement

LMK 307T

Level and Temperature Transmitter

Ceramic Sensor

accuracy according to IEC 60770:
0.5 % FSO

Nominal pressure / nominal temperature

from 0 ... 4 mH_2O up to 0 ... 250 mH_2O
from 0 ... 30 °C up to 0 ... 70 °C
others on request

Output signals

2-wire: 4 ... 20 mA (pressure)
2-wire: 4 ... 20 mA (temperature)

Special characteristics

- diameter 26.5 mm
- separate output signals
  for pressure and temperature ranges
- good long term stability
- easy handling
- low maintenance and wiring costs

Optional versions

- different kinds of cables
  and elastomers
- customer specific versions

The stainless steel submersible probe LMK 307T with flush mounted ceramic sensor has developed for continuous level and temperature measurement in water or waste water applications.

The advantage: simultaneous recording of level and temperature with separate independent signal amplification. The maintenance and wiring costs are considerably reduced.

In addition to classical signal processing of the level, an additional signal circuit independent of the level which converts the temperature signal into a 4 … 20 mA analogue signal in 2-wire technology is provided.

Preferred areas of use are

Water
drinking water systems
ground water monitoring
domestic water tanks
rain spillway basin

Sewage
waste water treatment, water recycling
dumpsite, waste water tanks

Fuel and oil
fuel storage
tank farm, biogas plants

BD SENSORS GmbH
BD-Sensors-Straße 1
D - 95199 Thierstein

Tel.: +49 (0) 92 35 / 98 11- 0
Fax: +49 (0) 92 35 / 98 11- 11

www.bdsensors.de
info@bdsensors.de

Input pressure range											
Nominal pressure gauge	[bar]	0.4	0.6	1	1.6	2.5	4	6	10	16	25
Level	[mH_2O]	4	6	10	16	25	40	60	100	160	250
Overpressure	[bar]	1	2	2	4	4	10	10	20	40	40
Burst pressure ≥	[bar]	2	4	4	5	5	12	12	25	50	50

Input temperature range				
Temperature measuring range standard:	0 … 30 °C	0 … 50 °C	0 … 70 °C	others on request [1]
[1] min. temperature range: 30°C; max. temperature range: 80°C min. temperature: -10°C; max. temperature: 70 °C				
Output signal / Supply				
2-wire (pressure) [2]	4 ... 20 mA / V_S = 10 ... 30 V_{DC}			
2-wire (temperature) [2]	4 ... 20 mA / V_S = 10 ... 30 V_{DC}			
[2] the circuits are galvanically isolated from each other				
Performance				
Accuracy (pressure) [3]	≤ ± 0.5 % FSO			
Accuracy (temperature) [4]	≤ ± 1 °C			
Permissible load	R_{max} = [(V_S – V_S min) / 0.02 A] Ω			
Influence effects	supply: 0.05 % FSO / 10 V		load: 0.05 % FSO / kΩ	
Long term stability	≤ ± 0.3 % FSO / year at reference conditions			
Response time	< 10 msec (for output signal 2-wire (pressure))			
[3] accuracy according to IEC 60770 – limit point adjustment (non-linearity, hysteresis, repeatability) [4] Pt 100 class B; compensation time up to 1 h depending on constant temperature and environmental respectively mass conditions				
Thermal effects (Offset and Span)				
Thermal error	≤ ± 0.2 % FSO / 10 K		in compensated range 0 … 70 °C	
Permissible temperatures				
Permissible temperatures	medium: -10 ... 70 °C		storage: -25 ... 70 °C	
Electrical protection [5]				
Short-circuit protection	permanent			
Reverse polarity protection	no damage, but also no function			
Electromagnetic compatibility	emission and immunity according to EN 61326			
[5] additional external overvoltage protection unit in terminal box KL 1 or KL 2 with atmospheric pressure reference available on request				
Electrical connection				
Cable with sheath material [6]	PVC (-5 … 70 °C) grey Ø 7.4 mm PUR (-10 … 70 °C) black Ø 7.4 mm FEP [7] (-10 … 70 °C) black Ø 7.4 mm others on request			
Cable capacitance	signal line/shield also signal line/signal line: 160 pF/m			
Cable inductance	signal line/shield also signal line/signal line: 1 µH/m			
Bending radius	static installation: 10-fold cable diameter dynamic application: 20-fold cable diameter			
[6] shielded cable with integrated ventilation tube for atmospheric pressure reference [7] do not use freely suspended probes with an FEP cable if effects due to highly charging processes are expected				
Materials (media wetted)				
Housing	stainless steel 1.4404 (316L)			
Seals	FKM EPDM others on request			
Diaphragm	ceramics Al_2O_3 96%			
Protection cap	POM-C			
Cable sheath	PVC, PUR, FEP			
Miscellaneous				
Current consumption	max. 25 mA			
Weight	approx. 250 g (without cable)			
Ingress protection	IP 68			
CE-conformity	EMC Directive: 2014/30/EU			

Wiring diagram

2x2-wire-system (current)

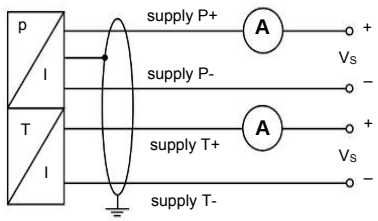

Pin configuration

Electrical connection	cable colours (IEC 60757)
Supply P+	WH (white)
Supply P–	BN (brown)
Supply T+	GY (grey)
Supply T–	PK (pink)
Shield	GNYE (green-yellow)

Dimensions (mm / in)

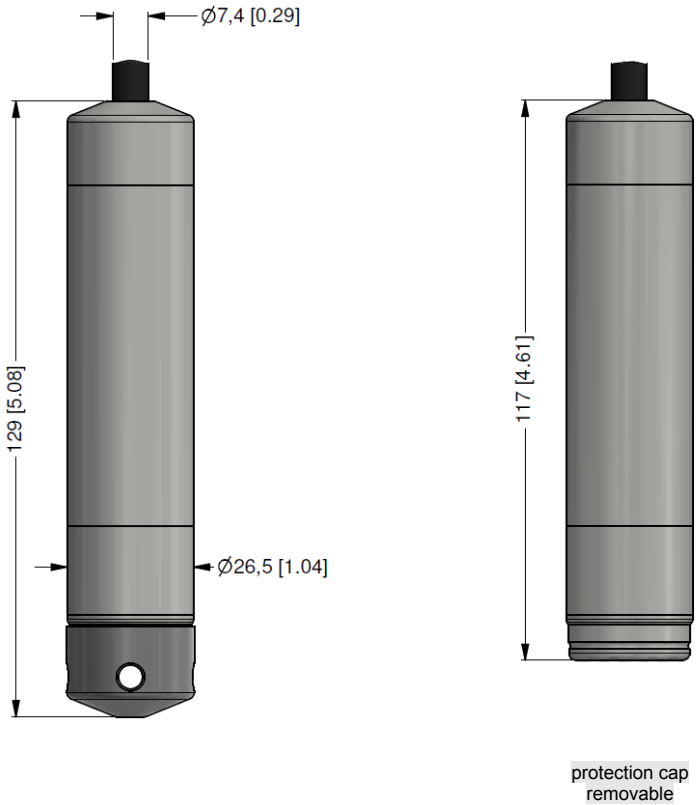

Mounting flange with cable gland

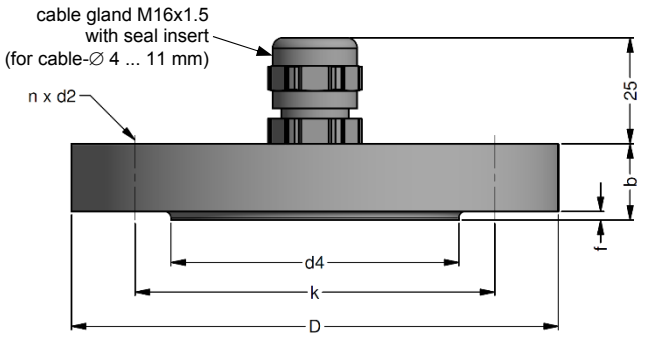

dimensions in mm			
size	DN25 / PN40	DN50 / PN40	DN80 / PN16
b	18	20	20
D	115	165	200
d2	14	18	18
d4	68	102	138
f	2	3	3
k	85	125	160
n	4	4	8

Technical data	
Suitable for	all probes
Flange material	stainless steel 1.4404 (316L)
Material of cable gland	standard: brass, nickel plated on request: stainless steel 1.4305 (303); plastic
Seal insert	material: TPE (ingress protection IP 68)
Hole pattern	according to DIN 2507

Ordering type	**Ordering code**	**Weight**
DN25 / PN40 with cable gland brass, nickel plated	ZMF2540	1.4 kg
DN50 / PN40 with cable gland brass, nickel plated	ZMF5040	3.2 kg
DN80 / PN16 with cable gland brass, nickel plated	ZMF8016	4.8 kg

Terminal clamp

Technical data	
Suitable for	all probes with cable ∅ 5.5 ... 10.5 mm
Material of housing	standard: steel, zinc plated optionally: stainless steel 1.4301 (304)
Material of clamping jaws and positioning clips	PA (fibre-glass reinforced)
Dimensions (mm)	174 x 45 x 32
Hook diameter	20 mm

Ordering type	**Ordering code**	**Weight**
Terminal clamp, steel, zinc plated	Z100528	approx. 160 g
Terminal clamp, stainless steel 1.4301 (304)	Z100527	

Display program

CIT 200 Process display with LED display

CIT 250 Process display with LED display and contacts

CIT 300 Process display with LED display, contacts and analogue output

CIT 350 Process display with LED display, bargraph, contacts and analogue output

CIT 400 Process display with LED display, contacts, analogue output and Ex-approval

CIT 600 Multichannel process display with graphics-capable LC display

CIT 650 Multichannel process display with graphics-capable LC display and datalogger

CIT 700 / CIT 750 Multichannel process display with graphics-capable TFT monitor, touchscreen and contacts

PA 440 Field display with 4-digit LC display

For further information please contact our sales department or visit our homepage: http://www.bdsensors.de

© 2020 BD|SENSORS GmbH – The specifications given in this document represent the state of engineering at the time of publishing. We reserve the right to make modifications to the specifications and materials.

Tel.: +49 (0) 92 35 / 98 11- 0
Fax: +49 (0) 92 35 / 98 11- 11

www.bdsensors.de
info@bdsensors.de

BD|SENSORS pressure measurement

BD|SENSORS pressure measurement

Ordering code LMK 307T

LMK 307T ☐☐☐-☐☐☐☐-☐☐☐☐☐☐-☐-☐-☐-☐-☐-☐-☐-☐☐☐-☐☐☐

Section / option		Code	
Pressure			
in bar		3 8 A	
in mH_2O		3 8 B	
Input [mH_2O]	**[bar]**		
4	0.4	4 0 0 0	
6	0.6	6 0 0 0	
10	1.0	1 0 0 1	
16	1.6	1 6 0 1	
25	2.5	2 5 0 1	
40	4.0	4 0 0 1	
60	6.0	6 0 0 1	
100	10	1 0 0 2	
160	16	1 6 0 2	
250	25	2 5 0 2	
customer		9 9 9 9	consult
Input temperature	**°C**		
0 … 30		0 0 0 x 3 0	
0 … 50		0 0 0 x 5 0	
0 … 70		0 0 0 x 7 0	
customer		9 9 9 9 9 9	consult
Housing			
stainless steel 1.4404 (316L)		1	
customer		9	consult
Diaphragm			
ceramic Al_2O_3 96 %		2	
customer		9	consult
Output pressure			
4 … 20 mA / 2-wire		1	
Output temperature			
4 … 20 mA / 2-wire		1	
Seals			
FKM		1	
EPDM		3	
customer		9	consult
Accuracy			
0.5 % FSO		5	
customer		9	consult
Electrical connection			
PVC-cable (grey, Ø 7.4 mm) [1]		1	
PUR-cable (black, Ø 7.4 mm) [1]		2	
FEP-cable (black, Ø 7.4 mm) [1]		3	
customer		9	consult
Cable length			
in m			
standard: 3 m	PVC	0 0 3	
standard: 5 m	PVC	0 0 5	
standard: 10 m	PVC	0 1 0	
standard: 15 m	PVC	0 1 5	
standard: 20 m	PVC	0 2 0	
special length	**PVC**	**9 9 9**	
standard: 3 m	PUR	0 0 3	
standard: 5 m	PUR	0 0 5	
standard: 10 m	PUR	0 1 0	
standard: 15 m	PUR	0 1 5	
standard: 20 m	PUR	0 2 0	
special length	**PUR**	**9 9 9**	
standard: 5 m	FEP	0 0 5	
standard: 10 m	FEP	0 1 0	
special length	**FEP**	**9 9 9**	
Special version			
standard		0 0 0	
customer		9 9 9	consult

[1] shielded cable with integrated ventilation tube for atmospheric pressure reference

Standard lengths 3 / 5 / 10 / 15 / 20 m are available from stock, special lengths are manufactured order-related.

© 2019 BD|SENSORS GmbH - The specifications given in this document represent the state of engineeringat the time of publishing. We reserve the right to make modifications to the specifications and materials.

01.09.2019

BD SENSORS GmbH
BD-Sensors-Straße 1
D - 95199 Thierstein

Tel.: +49 (0) 92 35 / 98 11- 0
Fax: +49 (0) 92 35 / 98 11- 11

www.bdsensors.com
info@bdsensors.de