

# AC117 Series

Multi-Purpose Accelerometer, Top Exit Connector / Cable, 50 mV/g



VIBRATION ANALYSIS HARDWARE



## Product Features


50 mV/g General Purpose Sensor

Excellent for Higher g Applications

- ▶ ±100 g, Dynamic Range
- ▶ 50 mV/g, ±10% Sensitivity
- ▶ 1,0-12500 Hz (60-750,000 CPM)

### AC117-1A


Connector Pin	Polarity
A	(+) Signal/Power
B	(-) Common



Stock Product

### AC117-2C


Conductor	Polarity
Red	(+) Signal/Power
Black	(-) Common
Shield	Cable Drain Wire



Built To Order

### AC117-3C


Conductor	Polarity
Red	(+) Signal/Power
Black	(-) Common
Shield	Cable Drain Wire



Built To Order

### AC117-6C


Conductor	Polarity
Red	(+) Signal/Power
Black	(-) Common
Shield	Cable Drain Wire



Built To Order

Specifications	Standard	Metric	Specifications	Standard	Metric
Part Number	AC117	M/AC117	<b>Environmental</b>		
Sensitivity (±10%)	50 mV/g		Temperature Range	-58 to 250°F	-50 to 121°C
Frequency Response (±3dB)	60-750,000 CPM	1,0-12500 Hz	Maximum Shock Protection	5,000 g, peak	
Frequency Response (±10%)	240-540,000 CPM	4,0-9000 Hz	Electromagnetic Sensitivity	CE	
Dynamic Range	± 100 g, peak		Sealing	Welded, Hermetic	
<b>Electrical</b>			Submersible Depth	200 ft.	60 m
Settling Time	<2 Seconds		<b>Physical</b>		
Voltage Source (IEPE)	18-30 VDC		Sensing Element	PZT Ceramic	
Constant Current Excitation	2-10 mA		Sensing Structure	Shear Mode	
Spectral Noise @ 10 Hz	8 µg/√Hz		Weight	3.2 oz	90 grams
Spectral Noise @ 100 Hz	2.5 µg/√Hz		Case Material	316L Stainless Steel	
Spectral Noise @ 1000 Hz	1.7 µg/√Hz		Mounting	1/4-28	
Output Impedance	<100 ohm		Connector (Non-Integral)	2 Pin MIL-C-5015	
Bias Output Voltage	10-14 VDC		Resonant Frequency	1,380,000 CPM	23000 Hz
Case Isolation	>10 <sup>9</sup> ohm		Mounting Torque	2 to 5 ft. lbs.	2,7 to 6,8 Nm
			Mounting Hardware	1/4-28 Stud	M6x1 Adapter Stud
			Calibration Certificate	CA10	

## Typical Frequency Response

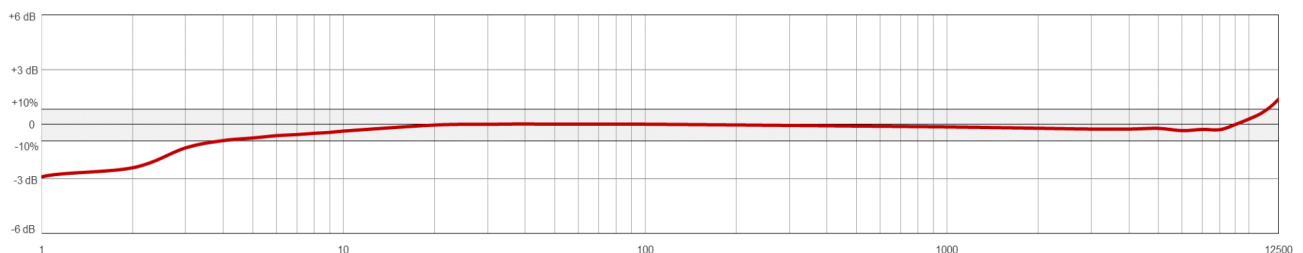

Backed by our Unconditional Lifetime Warranty

www.ctconline.com | sales@ctconline.com | 585-924-5900